

MRM-70B Single-Channel Diversity Receiver Module


Key Features

- Advanced diversity technology for optimum reception quality.
- Preset with 16 auto-scannable frequencies.
- One-touch Scan for a clear, interference-free frequency.
- One-touch ACT™ syncs the transmitter and receiver frequency automatically.
- Interference warning indicator.
- "Sensitivity" adjustor can be adjusted to minimize interference.
- Easy-to-read LED channel display.
- 5-segment RF and Audio meters.
- Dual "PiloTone & NoiseLock" circuits minimize interference.
- Modularized design allows easy installation and replacement.
- When installed, master level control enables volume be wirelessly controlled by an ACT-32HR transmitter microphone instead of a separate remote. (MA-708 & MA-808 portables)



Transmitters

ACT-32H	Handheld Transmitter
ACT-32HC	Rechargeable Handheld Transmitter
ACT-32HR	Remote Volume Control Handheld Transmitter (MA-708 & MA-808 only)
ACT-32T	Bodypack Transmitter
ACT-32TC	Rechargeable Bodypack Transmitter

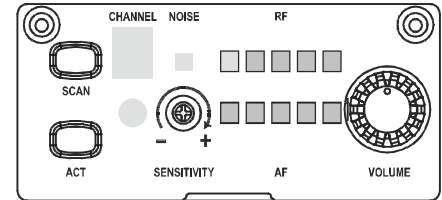

Related Products

MA-505	Portable Wireless PA System
MA-705	Portable Wireless PA System
MA-707	Portable Wireless PA System
MA-708	Portable Wireless PA System
MA-808	Portable Wireless PA System

Technical Specifications

Frequency Range	UHF 480 - 934MHz
Bandwidth	24 MHz
Preset channels	16
Receiving Mode	CPU-controlled diversity receiving
Oscillation Mode	PLL Synthesized
Sensitivity	6 dB μ V, at S/N > 80 dB
Spurious Emissions	< 82 dB
S/N Ratio	> 100 dBA
T.H.D.	< 0.5% @ 1kHz (Dev.=32kHz)
Frequency Response	60 Hz - 15 kHz (Overall system)
Squelch	"PiloTone & NoiseLock" dual-squelch circuit.
Audio Output	610 mV rms
Power Supply	12 - 15 V DC
Current Consumption	< 250 mA
Dimensions (W x H x D)	75 x 35 x 141 mm / 3.0 x 1.4 x 5.6 "
Weight	Approx. 126 g / 4.4 oz
Operating Temperature	-10~+60



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw